


# Cell Type CR2/3 8-L Specifications

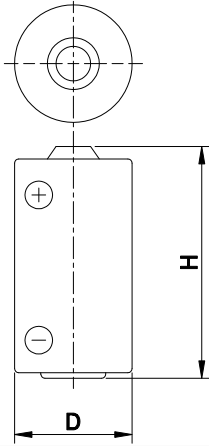


Nominal Voltage (V)		3
Nominal Capacity (mAh) *1		1900
Standard Discharge Current (mA)		0.5
Operating Temperature Range (°C) *2		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	17.0
	Height (H)	33.5
Approx. Weight (g)		16

\*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.


\*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.

## Typical Characteristics (Estimated Curve)


### Temperature Characteristics of CR2/3 8-L

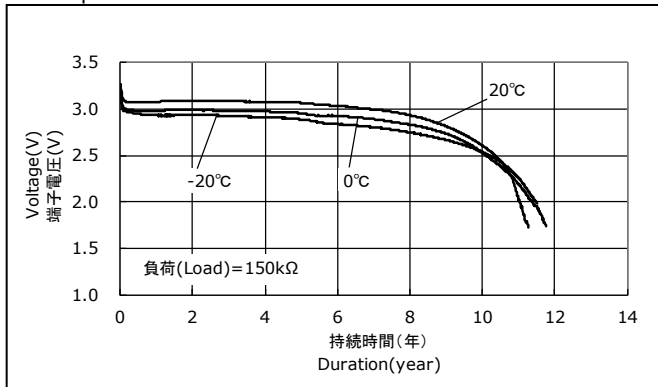


### Temperature Characteristics of CR2/3 8-L

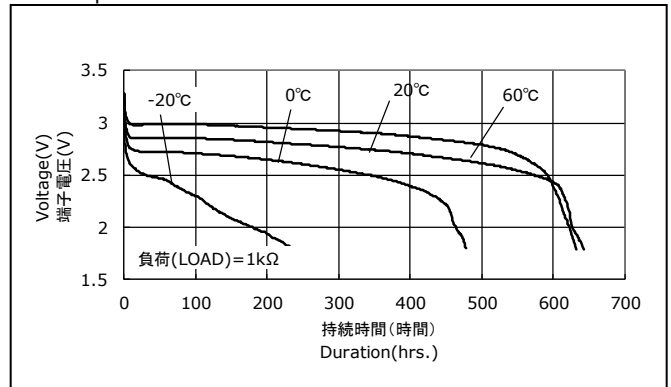

### Pulse discharge Characteristics of CR2/3 8-L

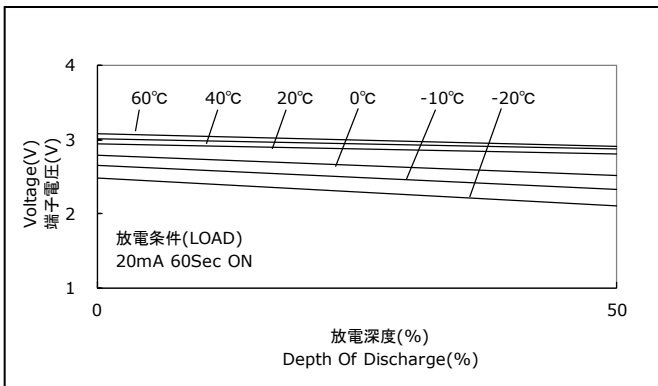

### Discharge Load vs. Cell Capacity of CR2/3 8-L

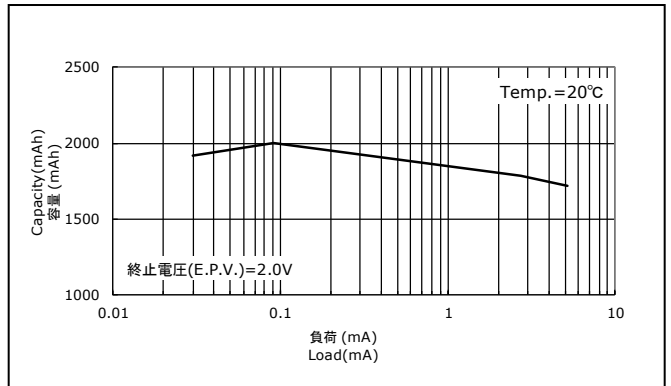

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.