

MODEL TL-4955

International size reference: 2/3AA, ER14335





TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



| | |
|--|-------------------|
| ■ Nominal capacity @ 0.5 mA, to 2V | 1.65 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 35 mA |
| ■ Maximum 1 sec. pulse capability | 75 mA |
| ■ Weight | 12.5 g (0.441 oz) |
| ■ Volume | 5.2 cc |
| ■ Operating temperature range | -55 °C to +85 °C |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

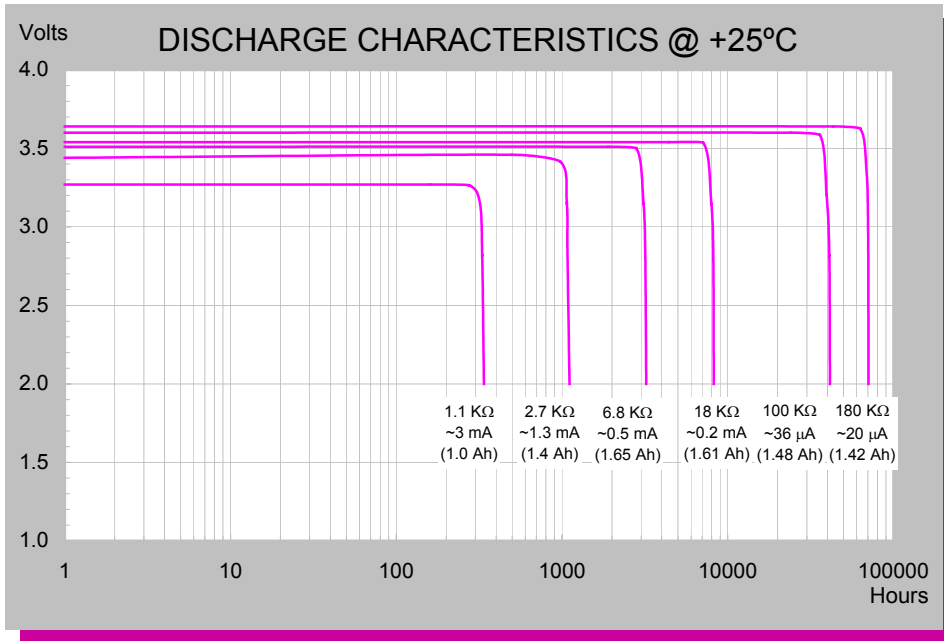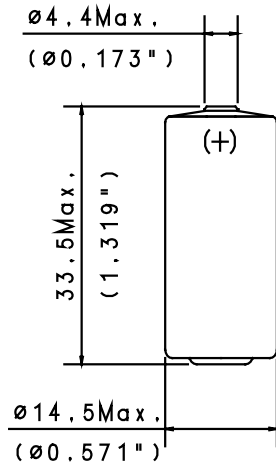

AVAILABLE TERMINATIONS

| | |
|----------------------------|---------------|
| SUFFIX- /S STANDARD | 15-4955-21000 |
| SUFFIX- /T SOLDER TABS | 15-4955-31000 |
| SUFFIX- /P AXIAL PINS | 15-4955-41000 |
| SUFFIX- /PT2 RADIAL PINS | 15-4955-36000 |
| SUFFIX- /TP POLARIZED TABS | 15-4955-52000 |
| SUFFIX- /PT POLARIZED TABS | 15-4955-53000 |

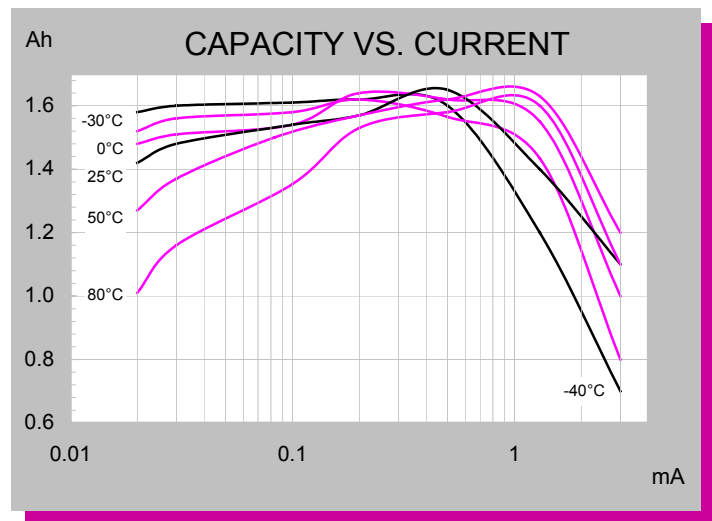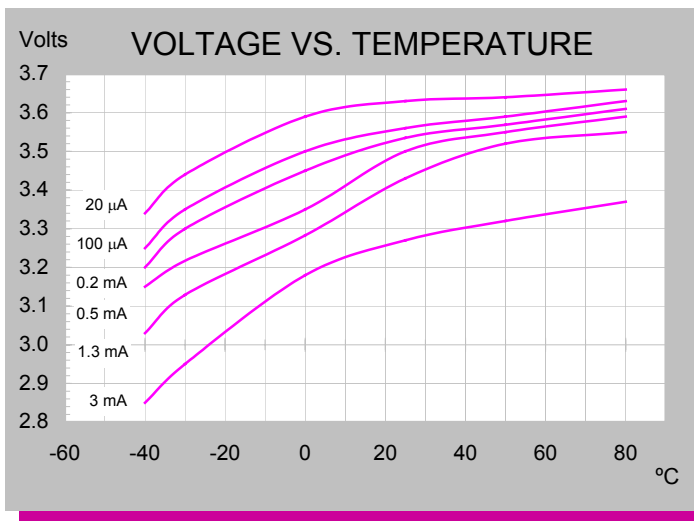

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06